



**5 WAY SELECTOR SWITCH
20P DOUBLE W/WH KNOB**

**VOLUME
1607-D20RL-A25K (P.P)**

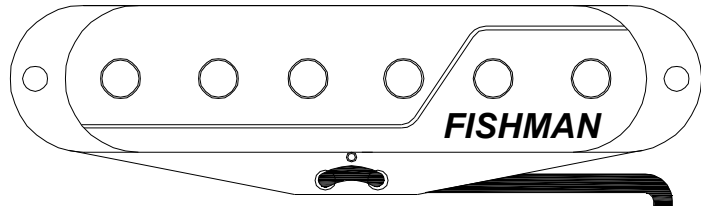


**FISHMAN SSP PASSIVE
SINGLE WHITE**

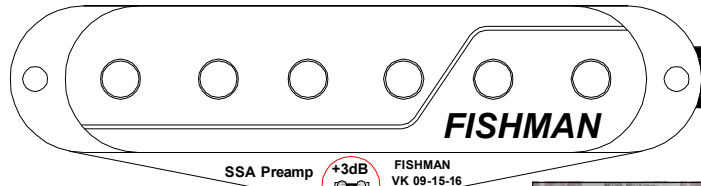


**FISHMAN SSA ACTIVE
SINGLE WHITE**



SSA Preamp +3dB FISHMAN VK 09-15-16
Tambah jumper
Bridge "3dB" pads on top side of PCB with solder to active +3dB Boost (Recommended)

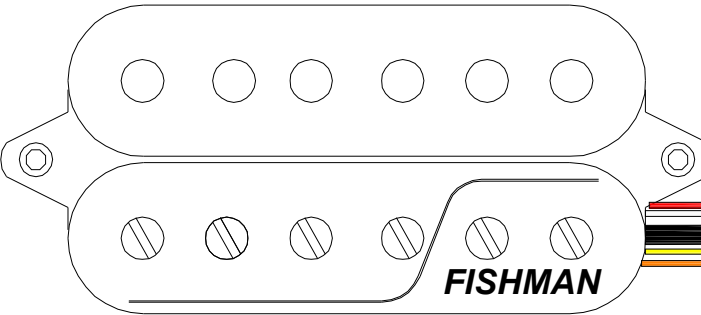

**FISHMAN OPEN CORE
PRF-COC-BW1 WHITE B**

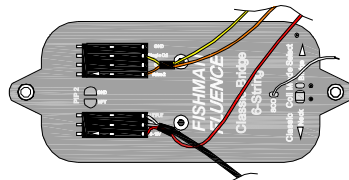

SSA Pickup-Wire Color Scheme (Single PU)
 Red : +9V
 White : SSA Coil (s) Out
 Yellow : Preamp In
 Green : Preamp Out
 Blue : 2&4 Position Dual Single Mode (Position 4)
 Black : 2&4 HB Tapped + Single Mode (Position 2)
 Shield : Ground

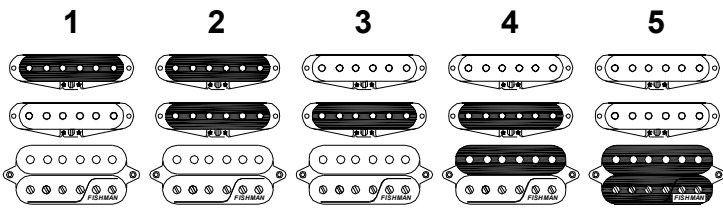

VOLUME
Pull for Position-5:
Bridge Pickup Voice-3, Single Coil
(Over rides Voice-1 or 2)

**MYLAR
0,22UF 50V 5%**

TONE
Pull for Position-5:
Bridge Pickup Voice-1
(Voice-2 default)

**TONE
1607-D20RL-A25K (P.P)**

PT. CORT INDONESIA

MODEL NAME	CORT - X700 TRIALITY		
DRAWING ON			
APPROVED BY	CHECKED BY	DESIGN BY	DRAWING BY